



## WaStop® Inline Check Valve Technical Specification Stainless Steel AISI 304/316

<b>Model no.:</b>	WS1185-S2-304/316	WS1185-S3-304/316	WS1185-S4-304/316
<b>Nominal Size:</b>	1200 mm		
<b>Pipe:</b>	Stainless Steel AISI 304/316		
<b>Membrane:</b>	Polyurethane		
<b>Fasteners:</b>	Marine grade stainless steel (AISI 316)		

Technical data:	Soft (S2)	Standard (S3)	Hard (S4)
Max. back pressure*:	3 mmH <sub>2</sub> O	5 mmH <sub>2</sub> O	8 mmH <sub>2</sub> O
Horizontal opening pressure*:	345 mmH <sub>2</sub> O	463** mmH <sub>2</sub> O	536** mmH <sub>2</sub> O
Horizontal closing pressure*:	274 mmH <sub>2</sub> O	289** mmH <sub>2</sub> O	326** mmH <sub>2</sub> O
Submerged opening pressure*:	205** mmH <sub>2</sub> O	236** mmH <sub>2</sub> O	264** mmH <sub>2</sub> O
Submerged closing pressure*:	126** mmH <sub>2</sub> O	145** mmH <sub>2</sub> O	162** mmH <sub>2</sub> O
Vertical opening pressure*:	544 mmH <sub>2</sub> O	604** mmH <sub>2</sub> O	665** mmH <sub>2</sub> O
Vertical closing pressure*:	339** mmH <sub>2</sub> O	376** mmH <sub>2</sub> O	414** mmH <sub>2</sub> O

\*) +/- 15% \*\*) Modeled value


- Values measured from bottom of pipe.

- Tests performed at room temperature (16-20 °C).

Max Flow	m/s	l/s
	5	5656

- Higher flows requires custom valve, contact Wapro

- Flange installation is highly recommended at flows above 2 m/s

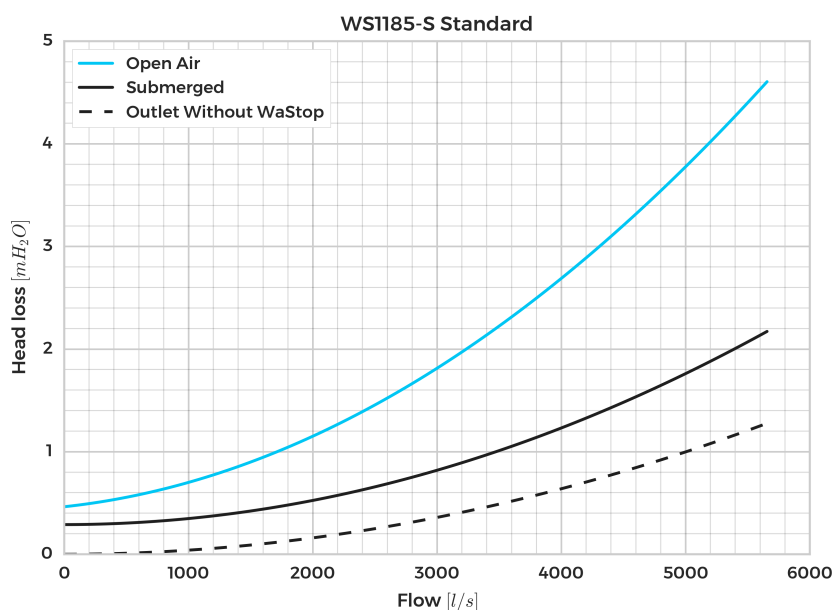

In the submerged case opening pressure [mmH<sub>2</sub>O / inH<sub>2</sub>O] is the difference between the water level upstream and the water level downstream and in the open-air case to the invert of the pipe. In vertical applications, the vertical opening pressure is measured from the outlet of the WaStop.

