

WaStop® Inline Check Valve Technical Specification Stainless Steel AISI 304/316


Model no.: WS790-S2-304/316-SH WS790-S3-304/316-SH WS790-S4-304/316-SH
Nominal Size: 800 mm
Pipe: Stainless Steel AISI 304/316
Membrane: Polyurethane
Fasteners: Marine grade stainless steel (AISI 316)

Technical data:	Soft (S2)	Standard (S3)	Hard (S4)
Max. back pressure*:	2 mH ₂ O	3 mH ₂ O	3 mH ₂ O
Horizontal opening pressure*:	250 mmH ₂ O	340** mmH ₂ O	380** mmH ₂ O
Horizontal closing pressure*:	175 mmH ₂ O	230** mmH ₂ O	255** mmH ₂ O
Submerged opening pressure*:	185** mmH ₂ O	210** mmH ₂ O	235** mmH ₂ O
Submerged closing pressure*:	60** mmH ₂ O	70** mmH ₂ O	90** mmH ₂ O
Vertical opening pressure*:	430 mmH ₂ O	480** mmH ₂ O	527** mmH ₂ O
Vertical closing pressure*:	260** mmH ₂ O	290** mmH ₂ O	319** mmH ₂ O

*) +/- 15% **) Modeled value
 - Values measured from bottom of pipe.
 - Tests performed at room temperature (16-20°C).

Max Flow	m/s	l/s
	4	2012

- Higher flows requires custom valve, contact Wapro
 - Flange installation is highly recommended at flows above 2 m/s

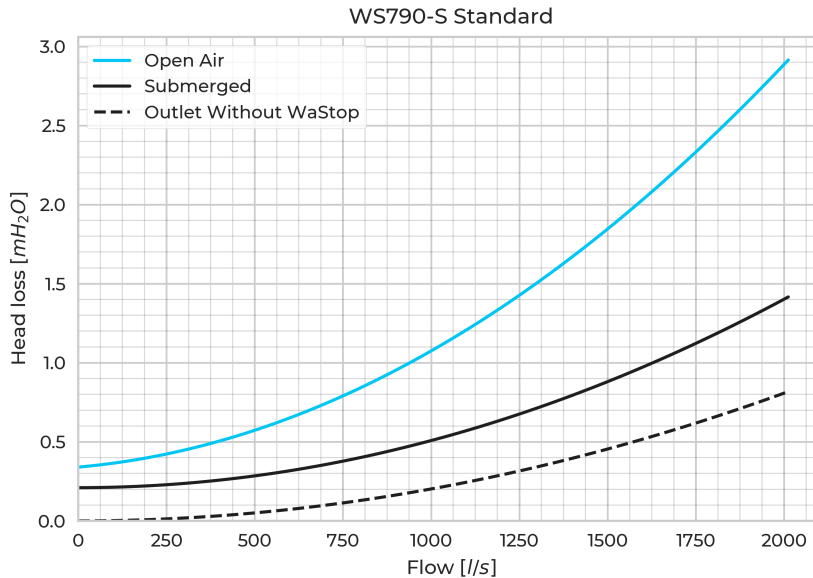

In the submerged case opening pressure [mmH₂O / inH₂O] is the difference between the water level upstream and the water level downstream and in the open-air case to the invert of the pipe. In vertical applications, the vertical opening pressure is measured from the outlet of the WaStop.

Postal address
 Wapro AB
 Munkahusvägen 103
 SE-374 31 Karlshamn
 SWEDEN

Tel: +46 454 185 10
 Fax: +46 454 123 38
 email: wapro@wapro.se
 Website: www.wapro.se

Reg.nr: 556352-1466
 Registered office:
 Karlshamn, Sweden
 VAT nr: SE 556 352 146604

HOLDING BACK
THE FLOOD